

OLED DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司
Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760
sales@raystar-optronics.com | www.raystar-optronics.com

SPECIFICATION

Model No:

REX012864AA

General Specification

The Features is described as follow:


- Module dimension: 42.04 x 27.22 x 1.41 mm
- Active area: 35.05 x 17.51 mm
- Dot Matrix: 128 x 64
- Pixel Size: 0.249 x 0.249 mm
- Pixel Pitch: 0.274 x 0.274 mm
- Duty: 1/64 Duty
- Display Mode: Passive Matrix
- Display Color: Monochrome
- IC: SSD1327
- Interface: 6800,8080,4-Wire SPI,I2C
- Size: 1.54 inch

Interface Pin Function

| Pin No. | Symbol | Description | | | | | | | | | | | | | | | |
|---------|---------------|---|---------------|---------------|---------------|--------|-----|-----|---|---|---|---|-----|---|---|---|---|
| 1 | VSS | This is a ground pin. | | | | | | | | | | | | | | | |
| 2 | VCC | Power supply for panel driving voltage. | | | | | | | | | | | | | | | |
| 3 | VCOMH | COM signal deselected voltage level. A capacitor should be connected between this pin and VSS. No external power supply is allowed to connect to this pin. | | | | | | | | | | | | | | | |
| 4 | VCI | Low voltage power supply and power supply for interface logic level. It should match with the MCU interface voltage level and must be connected to external source. VCI must always set to be equivalent to or higher than VDD. | | | | | | | | | | | | | | | |
| 5 | VDD | Power supply pin for core logic operation. VDD can be supplied externally (within the range of 2.4V to 2.6V) or regulated internally from VCI. A capacitor should be connected between VDD and VSS under all circumstances. | | | | | | | | | | | | | | | |
| 6 | BS1 | Communicating Protocol Select These pins are MCU interface selection input. See the following table: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th></th> <th>68XX-parallel</th> <th>80XX-parallel</th> <th>Serial</th> <th>I2C</th> </tr> </thead> <tbody> <tr> <td>BS1</td> <td>0</td> <td>1</td> <td>0</td> <td>1</td> </tr> <tr> <td>BS2</td> <td>1</td> <td>1</td> <td>0</td> <td>0</td> </tr> </tbody> </table> | | 68XX-parallel | 80XX-parallel | Serial | I2C | BS1 | 0 | 1 | 0 | 1 | BS2 | 1 | 1 | 0 | 0 |
| | 68XX-parallel | | 80XX-parallel | Serial | I2C | | | | | | | | | | | | |
| BS1 | 0 | | 1 | 0 | 1 | | | | | | | | | | | | |
| BS2 | 1 | 1 | 0 | 0 | | | | | | | | | | | | | |
| 7 | BS2 | | | | | | | | | | | | | | | | |
| 8 | VSS | This is a ground pin. | | | | | | | | | | | | | | | |
| 9 | IREF | This pin is the segment output current reference pin. A resistor should be connected between this pin and VSS to maintain the current around 10uA. | | | | | | | | | | | | | | | |
| 10 | CS# | This pin is the chip select input. The chip is enabled for MCU communication only when CS# is pulled low. | | | | | | | | | | | | | | | |
| 11 | RES# | This pin is reset signal input. When the pin is low, initialization of the chip is executed. | | | | | | | | | | | | | | | |
| 12 | D/C# | This pin is Data/Command control pin connecting to the MCU. When the pin is pulled HIGH, the data at D[7:0] will be interpreted as data. When the pin is pulled LOW, the data at D[7:0] will be transferred to a command register. In I2C mode, this pin acts as SA0 for slave address selection. | | | | | | | | | | | | | | | |
| 13 | R/W# (WR#) | This pin is read / write control input pin connecting to the MCU interface. When 6800 interface mode is selected, this pin will be used as Read/Write (R/W#) selection input. Read mode will be carried out when this pin is pulled HIGH and write mode when LOW. When 8080 interface mode is selected, this pin will be the Write (WR#) input. Data write operation is initiated when this pin is pulled LOW and the chip is selected. When serial or I2C interface is selected, this pin must be connected to VSS. | | | | | | | | | | | | | | | |

| | | |
|----|-------|--|
| 14 | E/RD# | <p>This pin is MCU interface input.</p> <p>When 6800 interface mode is selected, this pin will be used as the Enable (E) signal.</p> <p>Read/write operation is initiated when this pin is pulled HIGH and the chip is selected.</p> <p>When 8080 interface mode is selected, this pin receives the Read (RD#) signal. Read operation is initiated when this pin is pulled LOW and the chip is selected.</p> <p>When serial or I2C interface is selected, this pin must be connected to VSS.</p> |
| 15 | D0 | <p>These pins are 8-bit bi-directional data bus to be connected to the microprocessor's data bus. When serial mode is selected, D1 will be the serial data input SDIN and D0 will be the serial clock input SCLK.</p> |
| 16 | D1 | |
| 17 | D2 | |
| 18 | D3 | |
| 19 | D4 | |
| 20 | D5 | |
| 21 | D6 | |
| 22 | D7 | |
| 23 | VCC | Power supply for panel driving voltage. |
| 24 | VSS | This is a ground pin. |

Contour Drawing & Block Diagram

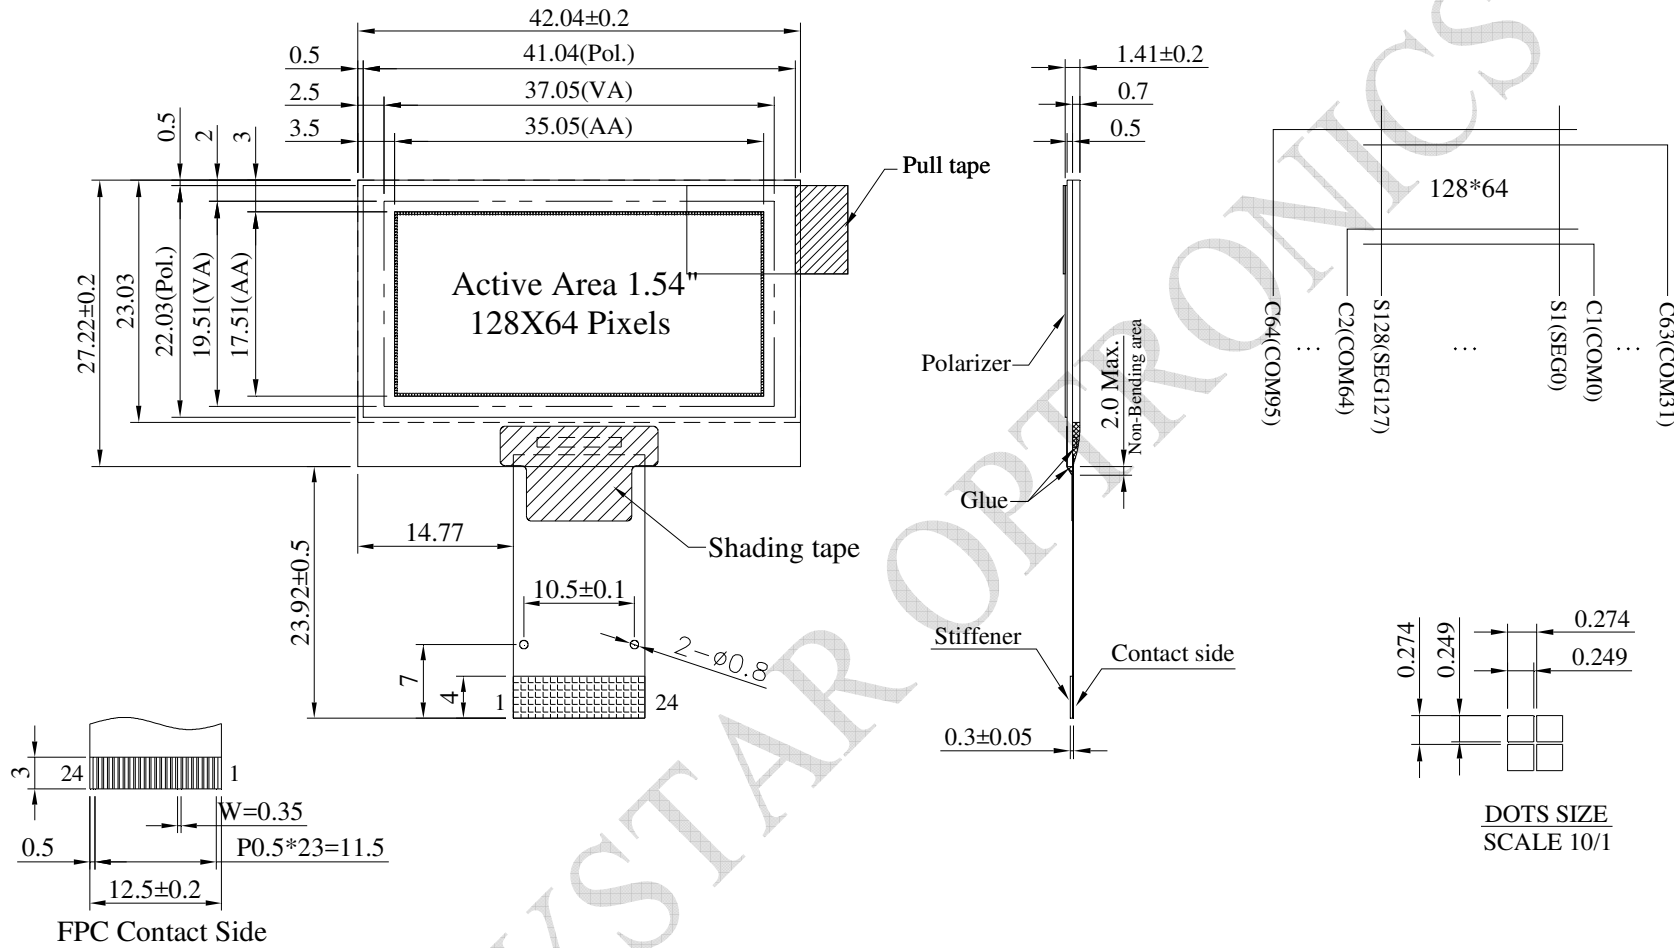

| PIN | SYMBOL |
|-----|-----------|
| 1 | VSS |
| 2 | VCC |
| 3 | VCOMH |
| 4 | VCI |
| 5 | VDD |
| 6 | BS1 |
| 7 | BS2 |
| 8 | VSS |
| 9 | IREF |
| 10 | CS# |
| 11 | RES# |
| 12 | D/C# |
| 13 | W/R#(WR#) |
| 14 | E(RD#) |
| 15 | D0 |
| 16 | D1 |
| 17 | D2 |
| 18 | D3 |
| 19 | D4 |
| 20 | D5 |
| 21 | D6 |
| 22 | D7 |
| 23 | VCC |
| 24 | VSS |

The non-specified tolerance of dimension is ±0.3 mm .

Absolute Maximum Ratings

| Parameter | Symbol | Min | Max | Unit |
|---|--------|------|------|------|
| Low voltage power supply, power supply for I/O pins | VCI | -0.3 | 4.0 | V |
| Supply Voltage for Logic | VDD | -0.5 | 2.75 | V |
| Supply Voltage for Display | VCC | -0.5 | 19.0 | V |
| Operating Temperature | TOP | -40 | +80 | °C |
| Storage Temperature | TSTG | -40 | +85 | °C |

Electrical Characteristics

DC Electrical Characteristics

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|---|--------|------------|---------|------|---------|------|
| Low voltage power supply, power supply for I/O pins | VCI | — | 1.65 | 3.0 | 3.5 | V |
| Supply Voltage for Display | VCC | — | 8.0 | 12.5 | 13.0 | V |
| Supply Voltage for Logic | VDD | — | 1.65 | — | 2.6 | V |
| High Level Input | VIH | — | 0.8×VCI | — | VCI | V |
| Low Level Input | VIL | — | 0 | — | 0.2×VCI | V |
| High Level Output | VOH | — | 0.9×VCI | — | VCI | V |
| Low Level Output | VOL | — | 0 | — | 0.1×VCI | V |
| 50% Check Board operating Current | ICC | VCC =12.5V | — | 10 | 20 | mA |