

TFT DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司
Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760
sales@raystar-optronics.com | www.raystar-optronics.com

RFA401280B-AYW-DNN

SPECIFICATION

General Specifications

- Size: 1.28 inch
- Dot Matrix: 240 x RGB x 240 (TFT) dots
- Module dimension: 35.60 x 37.74 x 1.56 mm
- Active area: 32.40 x 32.40 mm
- Dot pitch: 0.043 x 0.135 mm
- LCD type: TFT, Normally Black, Transmissive
- Viewing Angle: 80/80/80/80
- TFT Interface: SPI
- Backlight Type: LED ,Normally White
- Driver IC: GC9A01
- Touch Panel: Without Touch Panel
- Surface: Anti-Glare


*Color tone slight changed by temperature and driving voltage.

Interface

1. LCM PIN Definition

Pin	Symbol	Function	Remark
1-6	NC	No connection	
7	VLED+	Backlit positive	
8	VLED-	Backlit negative	
9	GND	Ground	
10	CS	Chip select signal	
11	SCL	Serial clock	
12	SDA	Serial data signal	
13	RS	Register select signal	
14	TE	TE signal	
15	RESET	LCD RESET Signal	
16	VCI3.3V	LCD Power supply	
17	NC	No connection	
18	GND	Ground	

Contour Drawing

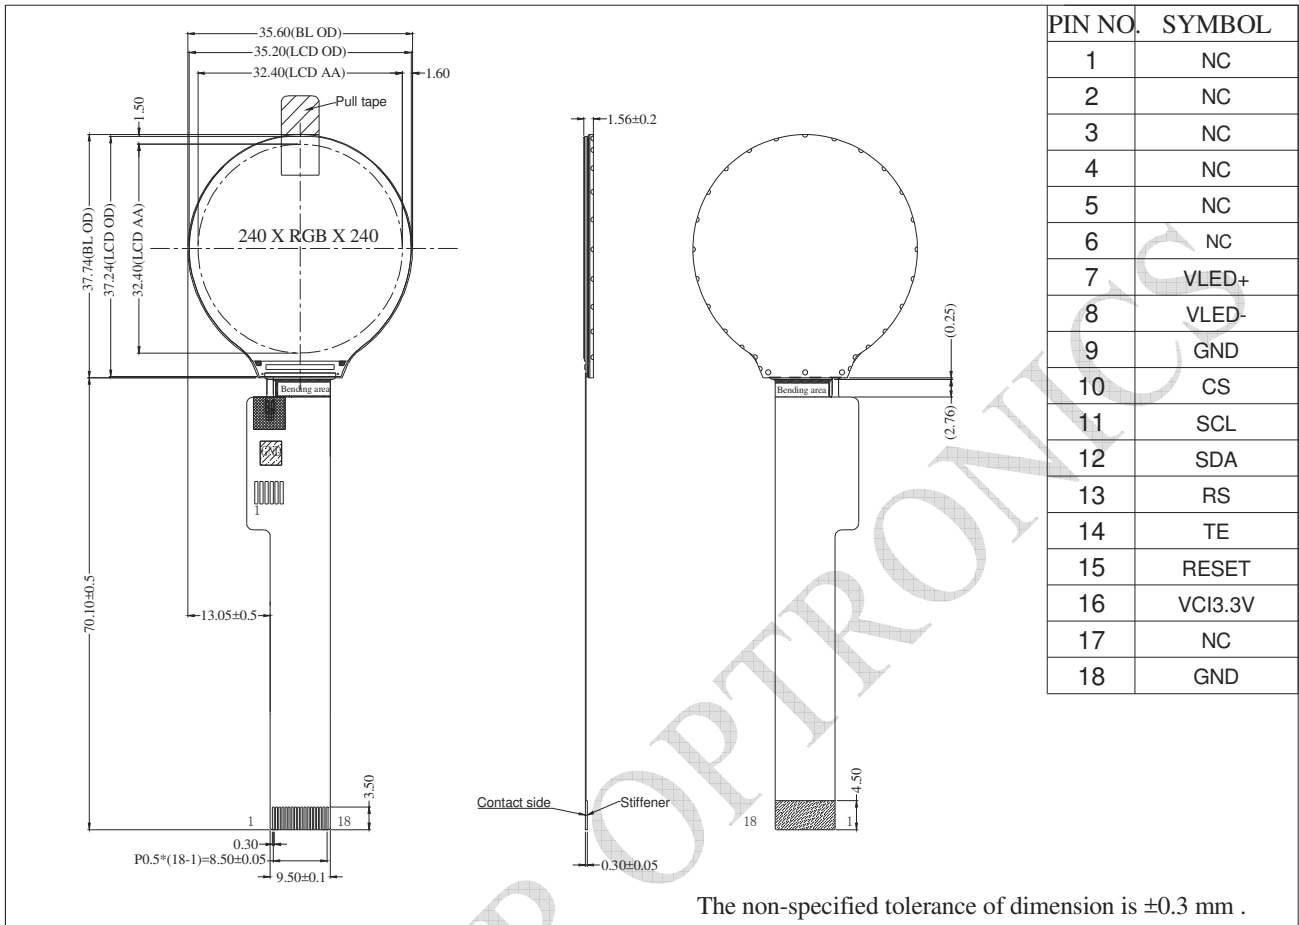

RAYSTAR OPTRONICS

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Operating conditions

Item	Symbol	Conditions	Standard Value			Unit
			Min	Typ	Max	
Power Supply Voltage for Analog	VCI	Ta= +25°C	2.7	2.8	3.3	V
Input High Voltage for LCD	VIH	-	0.8lovcc	-	lovcc	V
Input Low Voltage for LCD	VIL	-	Vss	-	0.2 lovcc	V
Output High Voltage for LCD	VOH	-	0.8lovcc	-	lovcc	V
Output Low Voltage for LCD	VOL	-	Vss	-	0.2 lovcc	V