



RAYSTAR

曜凌光電股份有限公司

Web: www.raystar-optronics.com E-mail: sales@raystar-optronics.com

RFF500F-AWH-DNN

SPECIFICATION

General Specifications

- Size: 5.0 inch
- Dot Matrix: 800 × 3(RGB) × 480 dots
- Module dimension: 120.7(W) × 75.8(H) × 2.8mm
- Active area: 108(W) × 64.8 (H) mm
- Dot pitch: 0.135(W) × 0.135(H) mm
- LCD type: TFT, Normally Black, Transmissive
- View Direction: 80/80/80/80
- Aspect Ratio: 16:9
- Driver IC: ST7262 or equivalent
- Interface: 24 bit R.G.B.
- Backlight Type: LED ,Normally White
- Touch Panel: Without Touch Panel
- Surface: Anti-Glare

*Color tone slight changed by temperature and driving voltage.


Interface

LCM PIN Definition

FPC Connector is used for the module electronics interface.

Pin	Symbol	Function
1	VLED-	Power for LED backlight (Cathode)
2	VLED+	Power for LED backlight (Anode)
3	GND	Power Ground
4	VDD	Power voltage
5	R0	Red data (LSB)
6	R1	Red data
7	R2	Red data
8	R3	Red data
9	R4	Red data
10	R5	Red data
11	R6	Red data
12	R7	Red data(MSB)
13	G0	Green data(LSB)
14	G1	Green data
15	G2	Green data
16	G3	Green data
17	G4	Green data
18	G5	Green data
19	G6	Green data
20	G7	Green data(MSB)
21	B0	Blue data(LSB)
22	B1	Blue data
23	B2	Blue data
24	B3	Blue data
25	B4	Blue data
26	B5	Blue data
27	B6	Blue data
28	B7	Blue data(MSB)
29	GND	Power Ground
30	CLK	Sample clock
31	DISP	Display on/off
32	NC	No connection
33	NC	No connection
34	DE	Data input enable
35	NC	No connection
36	GND	Power Ground
37	NC	No connection
38	NC	No connection
39	NC	No connection
40	NC	No connection

Contour Drawing

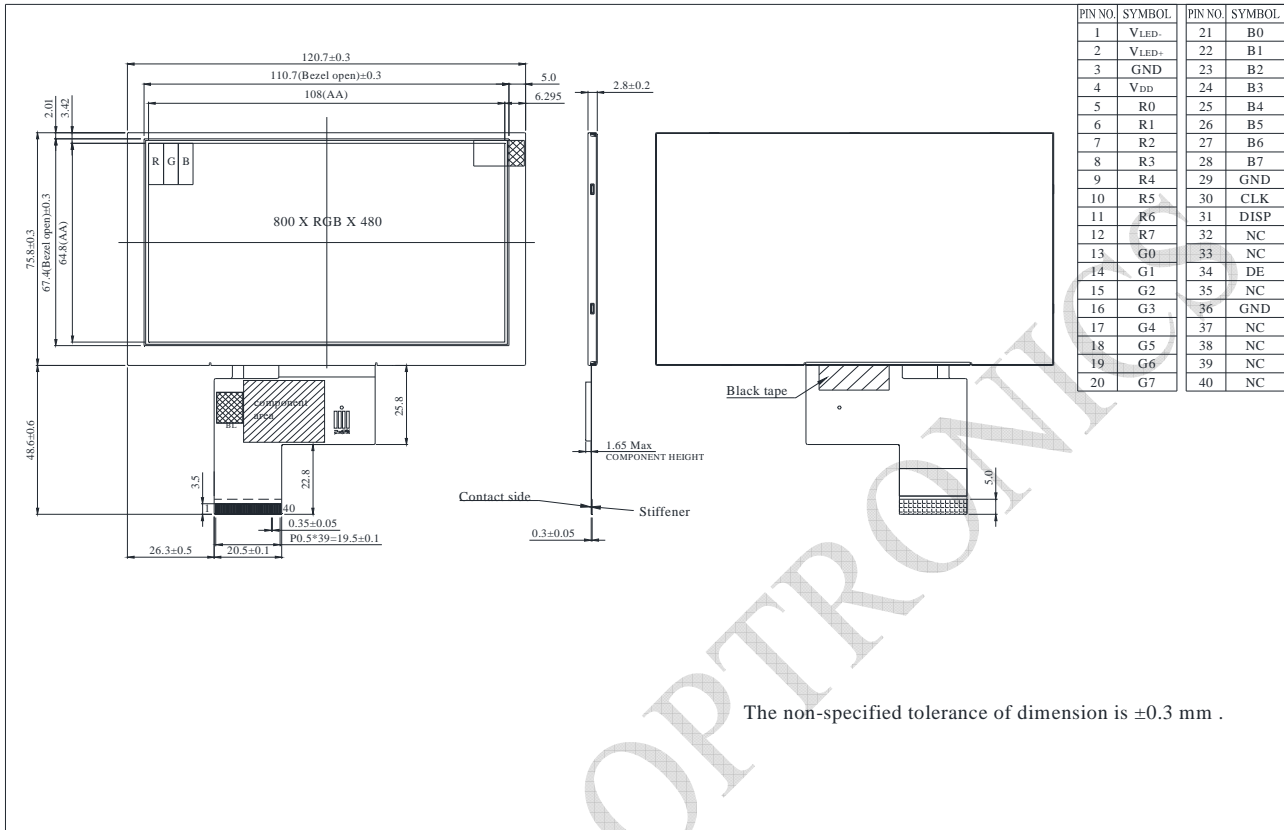

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Typical Operation Conditions

Item	Symbol	Values			Unit
		Min.	Typ.	Max.	
Power voltage	VDD	3.0	3.3	3.6	V
Current for Driver(Black)	IDD	-	65	97.5	mA
Input logic high voltage	VIH	0.7 VDD	-	VDD	V
Input logic low voltage	VIL	0	-	0.3 VDD	