



RAYSTAR

曜凌光電股份有限公司

Web: www.raystar-optronics.com E-mail: sales@raystar-optronics.com

RFF700R-AIW-DNS

SPECIFICATION

General Specifications

- Size: 7.0 inch
- Dot Matrix: 800 × 3(RGB) × 480 dots
- Module dimension: 165.0(W) × 100.0(H) × 7.2(D) mm
- Active area: 154.08(W) × 85.92(H) mm
- Dot pitch: 0.0642(W) × 0.1790(H) mm
- LCD type: a-Si TFT, Normally White, Transmissive
- View Direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- Backlight Type: LED ,Normally White
- Color arrangement: RGB-stripe
- Interface: Digital
- With /Without TP: With RTP
- Surface: Anti-Glare


Interface

FPC Connector is used for the module electronics interface. The recommended model is FH12A-50S-0.5SH manufactured by Hirose.

Pin No.	Symbol	I/O	Function
1	VLED+	P	Power for LED backlight (Anode)
2	VLED+	P	Power for LED backlight (Anode)
3	VLED-	P	Power for LED backlight (Cathode)
4	VLED-	P	Power for LED backlight (Cathode)
5	GND	P	Power ground
6	VCOM	I	Common voltage
7	VCC	P	Power for Digital Circuit
8	MODE	I	DE/SYNC mode select
9	DE	I	Data Input Enable
10	VS	I	Vertical Sync Input
11	HS	I	Horizontal Sync Input
12	B7	I	Blue data(MSB)
13	B6	I	Blue data
14	B5	I	Blue data
15	B4	I	Blue data
16	B3	I	Blue data
17	B2	I	Blue data
18	B1	I	Blue data
19	B0	I	Blue data(LSB)
20	G7	I	Green data(MSB)
21	G6	I	Green data
22	G5	I	Green data
23	G4	I	Green data
24	G3	I	Green data
25	G2	I	Green data
26	G1	I	Green data
27	G0	I	Green
28	R7	I	Red data(MSB)
29	R6	I	Red data
30	R5	I	Red data
31	R4	I	Red data
32	R3	I	Red data
33	R2	I	Red data
34	R1	I	Red data
35	R0	I	Red data(LSB)

36	GND	P	Power Ground
37	DCLK	I	Sample clock
38	GND	P	Power Ground
39	L/R	I	Left / right selection
40	U/D	I	Up/down selection
41	VGH	P	Gate ON Voltage
42	VGL	P	Gate OFF Voltage
43	AVDD	P	Power for Analog Circuit
44	RESET	I	Global reset pin.
45	NC	-	No connection
46	VCOM	I	Common Voltage
47	DITHB	I	Dithering function
48	GND	P	GND
49	NC	-	No connection
50	NC	-	No connection

Contour Drawing

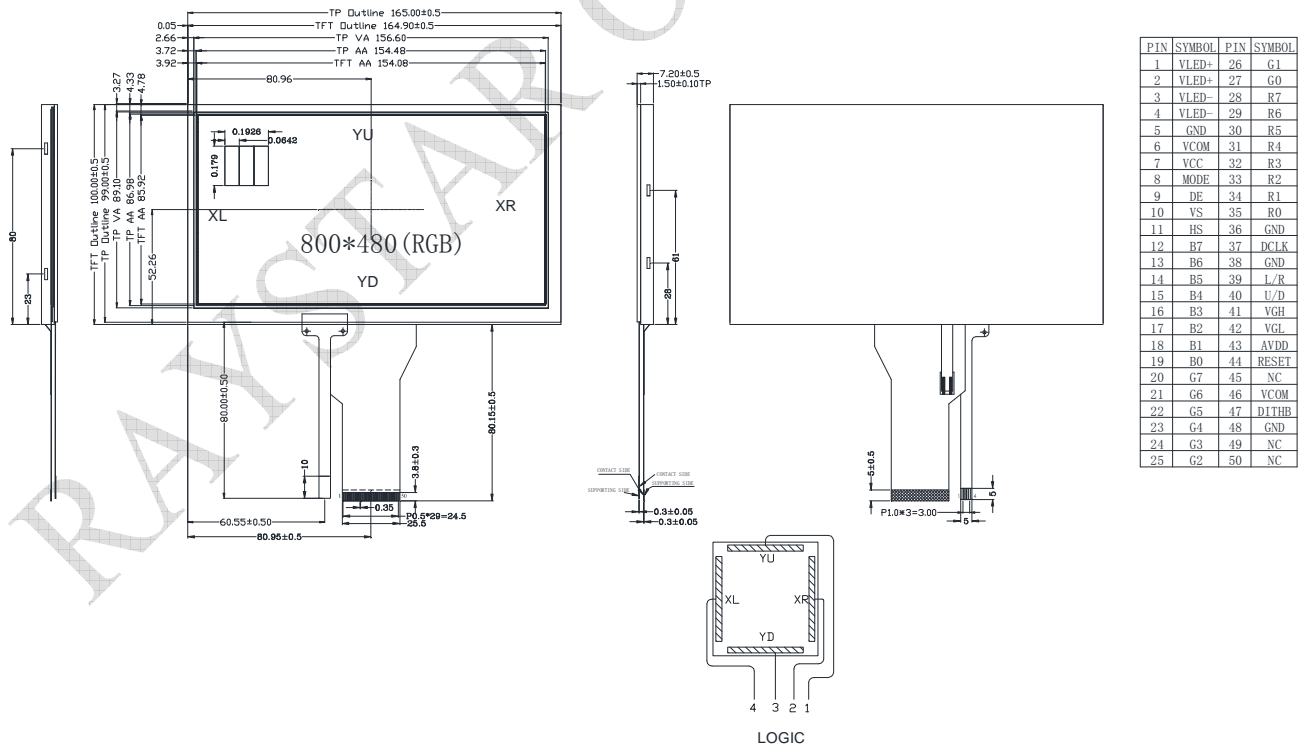

Absolute Maximum Ratings

Item	Symbol	Values		Unit
		Min	Max	
Power voltage	VCC	-0.3	5.0	V
	AVDD	6.5	13.5	V
	VGH	-0.3	40.0	V
	VGL	-20.0	0.3	V
	VGH-VGL	—	40.0	V
Operation Temperature	TOP	-20	70	°C
Storage Temperature	TST	-30	80	°C
LED Reverse Voltage	VR	—	1.2	V
LED Forward Current	IF	—	25	mA

Electrical Characteristics

Typical Operation Conditions

Item	Symbol	Values			Unit
		Min	Typ	Max	
Power voltage	VCC	3.0	3.3	3.6	V
	AVDD	10.2	10.4	10.6	V
	VGH	15.3	16.0	16.7	V
	VGL	-7.7	-7.0	-6.3	V
Input signal voltage	VCOM	2.6	3.6	4.6	V

Current Consumption

Item	Symbol	Values			Unit
		Min	Typ	Max	
Current for Driver	IGH	-	0.2	1.0	mA
	IGL	-	0.2	1.0	mA
	ICC	-	4.0	10	mA
	IAVDD	-	20	50	mA

Backlight Driving Conditions

Item	Symbol	Values			Unit
		Min	Typ	Max	
LED forward voltage	VL	8.4	9.3	10.2	V
LED forward current	IL	170	180	200	mA
LED life time	-	20,000	-	-	Hr

RAYSTAR OPTRONICS