



RAYSTAR

曜凌光電股份有限公司

Web: www.raystar-optronics.com E-mail: sales@raystar-optronics.com

RFG560B-AIW-DNN

SPECIFICATION

General Specifications

- Size: 5.6 inch (Diagonal)
- Dot Matrix: 640 × (RGB) × 480 dots
- Module dimension: 126.5(W) × 100(H) × 5.7(D) mm
- Active area: 112.896 (W) × 84.672(H) mm
- Dot pitch: 0.0588(W) × 0.1764(H) mm
- LCD type: TFT, Normally White ,Transmissive
- View Direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- Backlight Type: LED, Normally White
- With /Without TP: Without TP
- Surface: Anti-Glare


*Color tone slight changed by temperature and driving voltage.

Interface

LCM PIN Definition

Pin No.	Symbol	I/O	Function
1	VLED	P	Power Voltage for LED circuit
2	VLED	P	Power Voltage for LED circuit
3	ADJ	I	Adjust the LED brightness with PWM Pulse
4	GLED	P	Ground for LED circuit
5	GLED	P	Ground for LED circuit
6	VCC	P	Power Voltage for digital circuit
7	VCC	P	Power Voltage for digital circuit
8	MODE	I	DE or HV mode control
9	DE	I	Data enable
10	VS	I	Vsync signal input
11	HS	I	Hsync signal input
12	GND	P	Power ground
13	B5	I	Blue data input (MSB)
14	B4	I	Blue data input
15	B3	I	Blue data input
16	GND	P	Power ground
17	B2	I	Blue data input
18	B1	I	Blue data input
19	B0	I	Blue data input(LSB)
20	GND	P	Power ground
21	G5	I	Green data input(MSB)
22	G4	I	Green data input
23	G3	I	Green data input
24	GND	P	Power ground
25	G2	I	Green data input
26	G1	I	Green data input
27	G0	I	Green data input(LSB)
28	GND	P	Power ground
29	R5	I	Red data input(MSB)
30	R4	I	Red data input
31	R3	I	Red data input
32	GND	P	Power ground
33	R2	I	Red data input
34	R1	I	Red data input
35	R0	I	Red data input(LSB)
36	GND	P	Power ground
37	DCLK	I	Sample clock
38	GND	P	Power ground
39	L/R	I	Select left to right scanning direction
40	U/D	I	Select up or down scanning direction

Contour Drawing

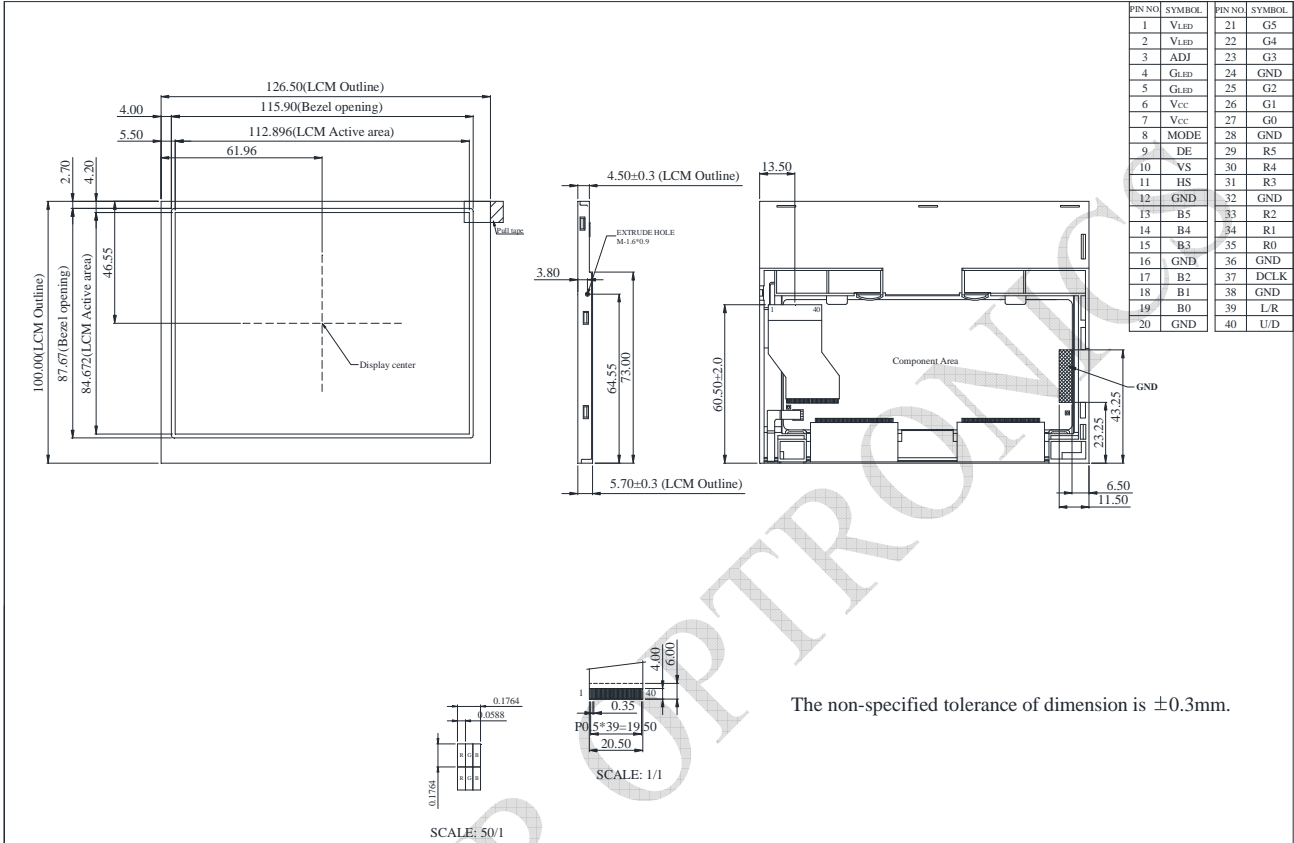

Absolute Maximum Ratings

Item	Symbol	Values		Unit
		Min.	MAX.	
Power voltage	Vcc	-0.3	6.5	V
	VLED	-0.3	6.5	V
Operation temperature	TOP	-20	70	°C
Storage temperature	TST	-30	80	°C

Electrical Characteristics

Typical Operation Conditions

Item	Symbol	Values			Unit
		Min	Typ	Max	
Power voltage	VCC	3.1	3.3	3.5	V
	VLED	4.8	5.0	5.2	V
Current Consumption	ICC	-	200	250	mA
	ILED	-	380	450	mA
Input logic high voltage	VIH	0.7VCC	-	1VCC	V
Input logic low voltage	VIL	0	-	0.3VCC	V
LED life time		20000	-	-	Hr